


44

Electrical + Circuits

Protective Coating Concentrate

Drives out moisture and keeps it out of
electrical connections.

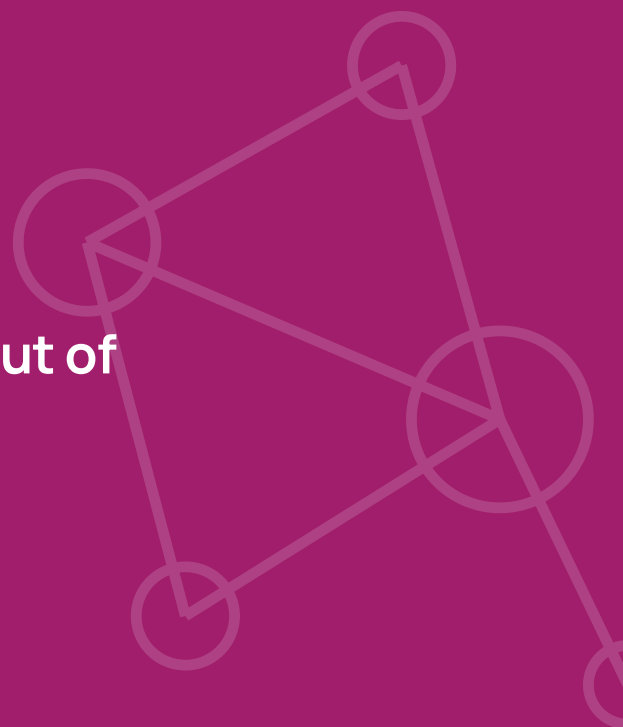

WHY SPECIFY IT

Drives out moisture

Creeps under water and lifts it off
contacts.

Prevents faults

Helps restore insulation resistance;
reduces corrosion.

Wide range

Works from -20 °C to +130 °C.

PFAS-free


Silicone-free

Water-displacing

Low-voltage

What it **does**

A penetrating, water-displacing protective film for electrical connections, terminals and assemblies. It creeps under water films, pushes moisture out of gaps and connectors, and leaves a thin, flexible, water-repellent layer. That helps restore and protect insulation resistance and reduces corrosion and current leakage. It contains no silicone, resin or aromatic solvents.

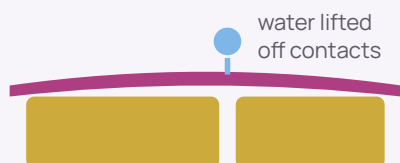

HOW IT WORKS

Highly refined oils with lower surface tension than water spread underneath it and lift it off metal and insulation, leaving a thin, flexible, insulating film that keeps moisture and oxygen out.

Where it's **used**

- Terminals, plugs and connectors
- Motors and windings
- Agricultural and mining equipment
- Junction boxes and switchgear
- Marine electrics
- Automotive low-voltage systems

At a **glance**

20–30 ml/m²

COVERAGE

2–10 minutes

WORKS IN

Stays flexible

FILM

–20 to +130

°C

OPERATING RANGE

Up to 2 years

LASTS

Supplied as a concentrate.

Preparing it for use needs a slightly more involved set-up, so we guide each customer through it. Ask us for trade pricing.

info@nilimanano.comnanoman.co.in